


Z443/...

Auswerferstift, DLC, abgesetzt, gehärtet, Form CH
 Ejector pin, DLC, shouldered, hardened
 Ejecteur, DLC, épaulé, trempé

Mat.: WS (≈ 1.2516)
 DIN 1530-2



3

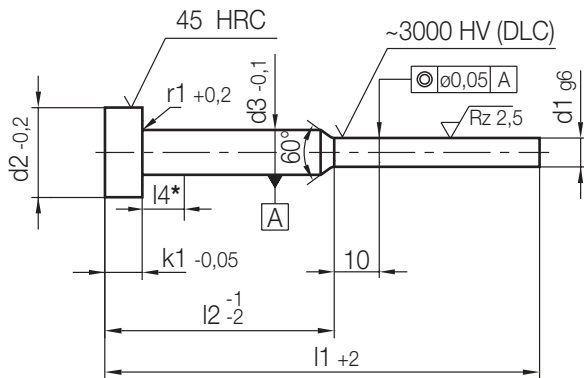

* unbeschichtet
 uncoated
 sans revêtement


| d3 | d2 | k1 | r1 | l4 | l2 | d1 | l1 | Nr./No. | | | |
|----|----|------------|-----|----|----|------------|-----------|--------------|----|------------|-----|
| 2 | 4 | 2 | 0,2 | - | 35 | 0,5 | 80 | Z443/0,5x 80 | | | |
| | | | | | | | | 5 | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | | | | | | | 250 | 250 |
| | | | | - | 35 | 0,6 | 80 | Z443/0,6x 80 | | | |
| | | | | | | | | 5 | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | | | | | | | 250 | 250 |
| | | | | - | 25 | 0,8 | 63 | Z443/0,8x 63 | | | |
| | | | | | | | | 5 | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | | | | | | | 250 | 250 |
| | | | | - | 25 | 1 | 63 | Z443/1 x 63 | | | |
| | | | | | | | | 5 | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | | | | | | | 250 | 250 |
| | | 275 | 275 | | | | | | | | |

| d3 | d2 | k1 | r1 | l4 | l2 | d1 | l1 | Nr./No. | | | |
|----|----|----|-----|----|----|------------|-----------|--------------|----|------------|-----|
| 2 | 4 | 2 | 0,2 | - | 25 | 1,2 | 63 | Z443/1,2x 63 | | | |
| | | | | | | | | 5 | 35 | 80 | 80 |
| | | | | | | | | | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | - | 25 | 1,3 | 63 | Z443/1,3x 63 | | | |
| | | | | | | | | 5 | 35 | 80 | 80 |
| | | | | | | | | | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |
| | | | | - | 25 | 1,4 | 63 | Z443/1,4x 63 | | | |
| | | | | | | | | 5 | 35 | 80 | 80 |
| | | | | | | | | | 50 | 100 | 100 |
| | | | | | | | | | | 125 | 125 |
| | | | | | | | | | 75 | 160 | 160 |
| | | | | | | | | | | 200 | 200 |

Z443/...

Auswerferstift, DLC, abgesetzt, gehärtet, Form CH
 Ejector pin, DLC, shouldered, hardened
 Ejecteur, DLC, épaulé, trempé

Mat.: WS (\approx 1.2516)
 DIN 1530-2

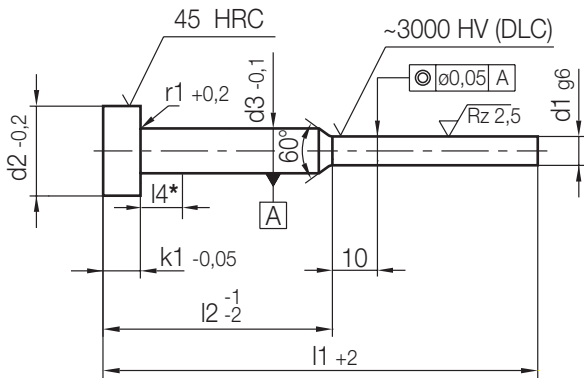

* unbeschichtet
 uncoated
 sans revêtement

| d3 | d2 | k1 | r1 | l4 | l2 | d1 | l1 | Nr./No. | | |
|----|----|----|-----|----|----|-----|-----|--------------|--------------|-----|
| 3 | 6 | 3 | 0,3 | - | 25 | 1,5 | 63 | Z443/1,5x 63 | | |
| | | | | | 35 | | 80 | 80 | | |
| | | | | | 5 | 50 | 100 | 100 | | |
| | | | | | | | 125 | 125 | | |
| | | | | | | 75 | 160 | 160 | | |
| | | | | | | | 200 | 200 | | |
| | | | | | | 100 | 250 | 250 | | |
| | | | | | | 125 | 275 | 275 | | |
| | | | | | - | 160 | 315 | 315 | | |
| | | | | 35 | | 1,6 | 80 | Z443/1,6x 80 | | |
| | | | | | | | 50 | 100 | 100 | |
| | | | | | | | | 125 | 125 | |
| | | | | 75 | | 160 | 160 | | | |
| | | | | - | | 35 | 1,8 | 80 | Z443/1,8x 80 | |
| | | | | | | | | 50 | 100 | 100 |
| | | | | | | | | | 125 | 125 |
| | | | | 75 | | 160 | 160 | | | |
| | | | | | | | 200 | 200 | | |

| d3 | d2 | k1 | r1 | l4 | l2 | d1 | l1 | Nr./No. | |
|----|----|----|-----|----|----|-----|-----|---------------|---------------|
| 3 | 6 | 3 | 0,3 | - | 35 | 2 | 80 | Z443/2 x 80 | |
| | | | | | | | 100 | 100 | |
| | | | | | | | 125 | 125 | |
| | | | | | | | 50 | 160 | 160 |
| | | | | | | | | 200 | 200 |
| | | | | | | | | 250 | 250 |
| | | | | | 5 | 75 | 2,2 | 315 | 315 |
| | | | | | | | | 100 | Z443/2,2x 100 |
| | | | | | | | | 125 | 125 |
| | | | | | | | | 160 | 160 |
| | | | | | | | | 200 | 200 |
| | | | | | | | | 250 | 250 |
| | | | | - | 75 | 2,5 | 100 | Z443/2,5x 100 | |
| | | | | | | | 125 | 125 | |
| | | | | | | | 160 | 160 | |
| | | | | | | | 200 | 200 | |
| | | | | | | | 250 | 250 | |
| | | | | | | | 315 | 315 | |