


Z46/...

Flachauswerfer, gehärtet, plasmanitriert, oxidiert
 Flat ejector pin, hardened, plasma-nitrided, oxidised
 Douille d'usure, trempé et nitruré

Mat.: WAS (≈ 1.2343)
 DIN ISO 8693
 (DIN 1530-4)

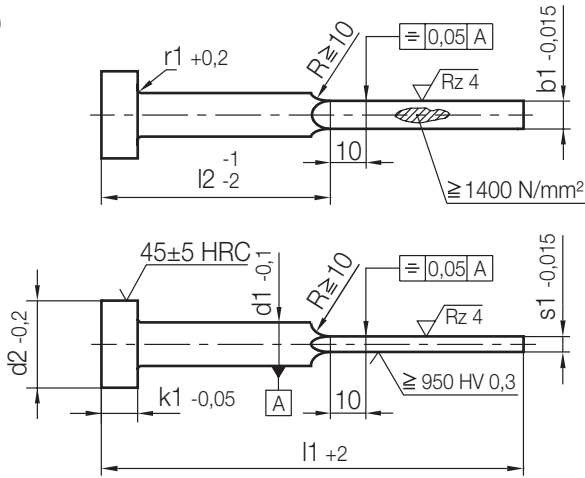

r1	k1	l2	d2	d1	b1	s1	l1	Nr./No.	
0,3	3	30	8	4,2	3,8	0,8	63	Z46/3,8x0,8x 63	
							80	80	
							100	100	
							125	125	
							1	63	Z46/3,8x1 x 63
							80	80	
							100	100	
							125	125	
							160	160	
							1,2	80	Z46/3,8x1,2x 80
		100	100						
		125	125						
		160	160						
		40	10	5	4,5	1	80	Z46/4,5x1 x 80	
		100	100						
		125	125						
		160	160						
		1,2	80	Z46/4,5x1,2x 80					
		100	100						
		125	125						
160	160								
1,5	100	Z46/4,5x1,5x100							
125	125								
160	160								
200	200								
0,5	5	40	12	6	5,5	1	80	Z46/5,5x1 x 80	
							100	100	
							125	125	
							160	160	
							1,2	80	Z46/5,5x1,2x 80
							100	100	
							125	125	
							160	160	
							1,5	100	Z46/5,5x1,5x100
							125	125	
		160	160						
		200	200						
		2	125	Z46/5,5x2 x125					
		160	160						
		200	200						

r1	k1	l2	d2	d1	b1	s1	l1	Nr./No.		
0,5	5	50	14	8	7,5	1,2	100	Z46/ 7,5x1,2x100		
							125	125		
							160	160		
							200	200		
							1,5	125	Z46/ 7,5x1,5x125	
							160	160		
							200	200		
							250	250		
							2	160	Z46/ 7,5x2 x160	
							200	200		
		250	250							
		315	315							
		80	16	10	9,5	1,5	160	Z46/ 9,5x1,5x160		
		200	200							
		250	250							
		315	315							
		2	200	Z46/ 9,5x2 x200						
		250	250							
		315	315							
		400	400							
0,8	7	100	18	12			11,5	200	Z46/11,5x2 x200	
250		250								
315		315								
400		400								
2,5		200			Z46/11,5x2,5x200					
250		250								
315		315								
400		400								
100		22			16	15,5		2	200	Z46/15,5x2 x200
250									250	
315	315									
400	400									
2,5	200		Z46/15,5x2,5x200							
250	250									
315	315									
400	400									