
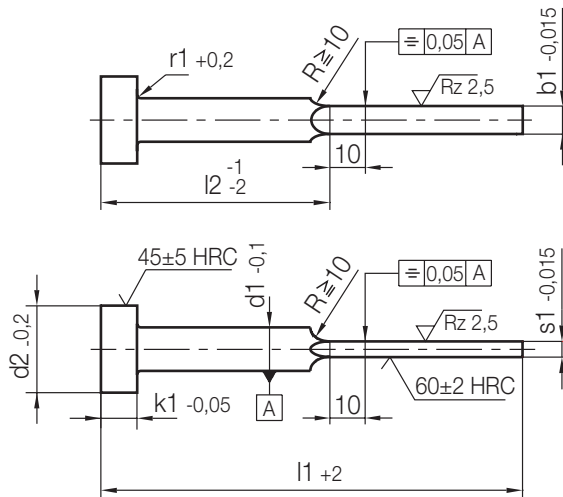


Z465 /...

Flachauswerfer, gehärtet, Form FAH
 Flat ejector pin, hardened
 Éjecteur lame, trempé

Mat.: WS (≈ 1.2516)
 DIN ISO 8693 (DIN 1530-4)

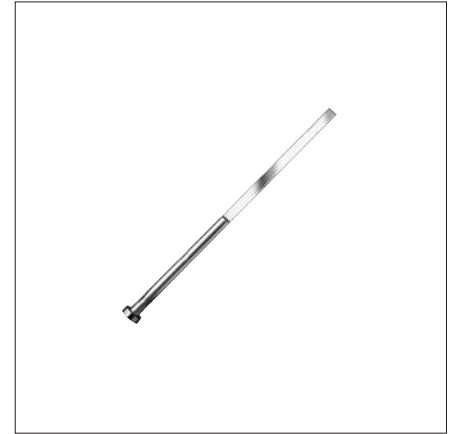



| r1 | k1 | l2 | d2 | d1 | b1 | s1 | l1 | Nr./No. |
|-----|----|-----|-----|-----|------------------|------------------|-----|------------------|
| 0,3 | 3 | 40 | 6 | 3 | 2,8 | 0,5 | 80 | Z465/2,8x0,5x 80 |
| | | | | | | | 100 | 100 |
| | | | | | | | 125 | 125 |
| | | | | | | | 160 | 160 |
| | | | | | | | 80 | 80 |
| | | 40 | 0,6 | 80 | Z465/2,8x0,6x 80 | | | |
| | | | | 100 | 100 | | | |
| | | | | 125 | 125 | | | |
| | | | | 160 | 160 | | | |
| | | | | 80 | 80 | | | |
| | | 40 | 0,8 | 80 | Z465/2,8x0,8x 80 | | | |
| | | | | 100 | 100 | | | |
| | | | | 125 | 125 | | | |
| | | | | 160 | 160 | | | |
| | | | | 200 | 200 | | | |
| | | 50 | 1 | 100 | Z465/2,8x1 x100 | | | |
| | | | | 125 | 125 | | | |
| | | | | 160 | 160 | | | |
| | | | | 200 | 200 | | | |
| | | | | 80 | 80 | | | |
| 40 | 8 | 4,2 | 3,8 | 0,6 | 80 | Z465/3,8x0,6x 80 | | |
| | | | | | 100 | 100 | | |
| | | | | | 125 | 125 | | |
| | | | | | 160 | 160 | | |
| | | | | | 200 | 200 | | |
| | | 30 | 0,8 | 63 | Z465/3,8x0,8x 63 | | | |
| | | | | 80 | 80 | | | |
| | | | | 100 | 100 | | | |
| | | | | 125 | 125 | | | |
| | | | | 160 | 160 | | | |
| 100 | | | | | 200 | 200 | | |
| | | | | | 200 | 200 | | |
| | | | | | 200 | 200 | | |
| | | | | | 200 | 200 | | |
| | | | | | 200 | 200 | | |

| r1 | k1 | l2 | d2 | d1 | b1 | s1 | l1 | Nr./No. | | |
|-----|-----|-----|-----|-----|-----|------------------|-----|------------------|-----------------|------------------|
| 0,3 | 3 | 125 | 8 | 4,2 | 3,8 | 0,8 | 250 | Z465/3,8x0,8x250 | | |
| | | | | | | | 1 | 63 | Z465/3,8x1 x 63 | |
| | | | | | | | 80 | 80 | | |
| | | | | | | | 100 | 100 | | |
| | | | | | | | 125 | 125 | | |
| | | | | | | | 160 | 160 | | |
| | | | | | | | 200 | 200 | | |
| | | | | | | | 250 | 250 | | |
| | | | | | | | 40 | 1,2 | 80 | Z465/3,8x1,2x 80 |
| | | | | | | | | | 100 | 100 |
| | | 125 | 125 | | | | | | | |
| | | 160 | 160 | | | | | | | |
| | | 200 | 200 | | | | | | | |
| | | 40 | 10 | 5 | 4,5 | 1 | 80 | Z465/4,5x1 x 80 | | |
| | | | | | | | 100 | 100 | | |
| | | | | | | | 125 | 125 | | |
| | | | | | | | 160 | 160 | | |
| | | | | | | | 200 | 200 | | |
| | | | | | | | 250 | Z250 | | |
| | | | | | | | 40 | 1,2 | 80 | Z465/4,5x1,2x 80 |
| 100 | 100 | | | | | | | | | |
| 125 | 125 | | | | | | | | | |
| 160 | 160 | | | | | | | | | |
| 200 | 200 | | | | | | | | | |
| 100 | | | | | 250 | 250 | | | | |
| | | | | | 315 | 315 | | | | |
| | | | | | 100 | Z465/4,5x1,5x100 | | | | |
| | | | | | 100 | 100 | | | | |
| | | | | | 100 | 100 | | | | |

Z465/...

Flachauswerfer, gehärtet, Form FAH
 Flat ejector pin, hardened
 Éjecteur lame, trempé

Mat.: WS (≈ 1.2516)
 DIN ISO 8693 (DIN 1530-4)

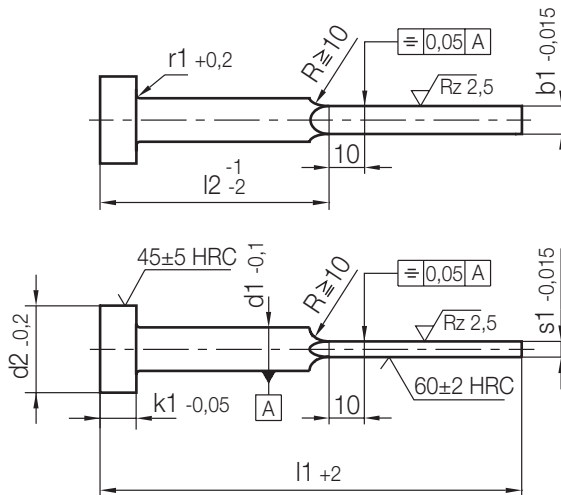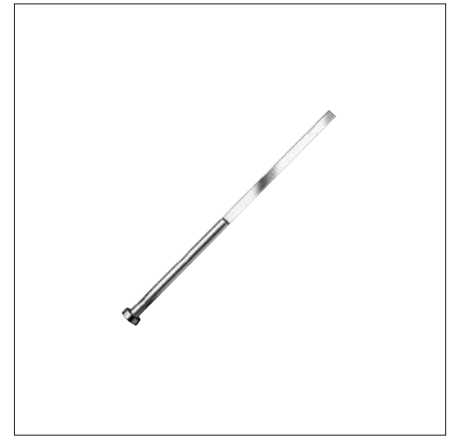

3

| r1 | k1 | l2 | d2 | d1 | b1 | s1 | l1 | Nr./No. | |
|-----|----|-----|-----|-----|-----|------------------|-----|------------------|------------------|
| 0,3 | 3 | 60 | 10 | 5 | 4,5 | 1,5 | 125 | Z465/4,5x1,5x125 | |
| | | 80 | | | | | 160 | 160 | |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | | 250 | 250 | |
| 0,5 | 5 | 40 | 12 | 6 | 5,5 | 1 | 80 | Z465/5,5x1 x 80 | |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | | 250 | 250 | |
| | | 40 | | | | | 1,2 | 80 | Z465/5,5x1,2x 80 |
| | | 50 | | | | | 100 | 100 | |
| | | 60 | | | | | 125 | 125 | |
| | | 80 | | | | | 160 | 160 | |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | | 250 | 250 | |
| | | 50 | | | | | 1,5 | 100 | Z465/5,5x1,5x100 |
| | | 60 | | | | 125 | 125 | | |
| | | 80 | | | | 160 | 160 | | |
| | | 100 | | | | 200 | 200 | | |
| | | 125 | | | | 250 | 250 | | |
| | | 160 | | | | 315 | 315 | | |
| | | 50 | | | | 2 | 100 | Z465/5,5x2 x100 | |
| | | 60 | | | | 125 | 125 | | |
| | | 80 | | | | 160 | 160 | | |
| | | 100 | | | | 200 | 200 | | |
| | | 125 | | | | 250 | 250 | | |
| 50 | 14 | 8 | 7,5 | 1,2 | 100 | Z465/7,5x1,2x100 | | | |

| r1 | k1 | l2 | d2 | d1 | b1 | s1 | l1 | Nr./No. | |
|-----|-----|-----|----|----|------|-----|-----|-------------------|-------------------|
| 0,5 | 5 | 60 | 14 | 8 | 7,5 | 1,2 | 125 | Z465/ 7,5x1,2x125 | |
| | | 80 | | | | | 160 | 160 | |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | | 250 | 250 | |
| | | 160 | | | | | 315 | 315 | |
| | | 60 | | | | | 1,5 | 125 | Z465/ 7,5x1,5x125 |
| | | 80 | | | | | 160 | 160 | |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | | 250 | 250 | |
| | | 160 | | | | | 315 | 315 | |
| 0,5 | 5 | 60 | 16 | 10 | 9,5 | 1,5 | 160 | Z465/ 7,5x2 x160 | |
| | | 200 | | | | | 200 | | |
| | | 250 | | | | | 250 | | |
| | | 80 | | | | | 1,5 | 160 | Z465/ 9,5x1,5x160 |
| | | 100 | | | | | 200 | 200 | |
| | | 125 | | | | 250 | 250 | | |
| | | 160 | | | | 315 | 315 | | |
| | | 100 | | | | 2 | 200 | Z465/ 9,5x2 x200 | |
| | | 125 | | | | 250 | 250 | | |
| | | 160 | | | | 315 | 315 | | |
| 0,8 | 7 | 100 | 18 | 12 | 11,5 | 2,5 | 200 | Z465/11,5x2 x200 | |
| | | 250 | | | | | 250 | | |
| | | 315 | | | | | 315 | | |
| | | 100 | | | | | 200 | Z465/11,5x2,5x200 | |
| | | 125 | | | | | 250 | 250 | |
| 160 | 315 | 315 | | | | | | | |