


Z4655 /...

Flachauswerfer, mit vier Eckenradien
 Flat ejector pin, with four corner radii
 Ejecteur lame, avec 4 rayons d'angle

Mat.: WS (≈ 1.2516)
 DIN ISO 8693 (DIN 1530-4)
 gehärtet/hardened/trempé

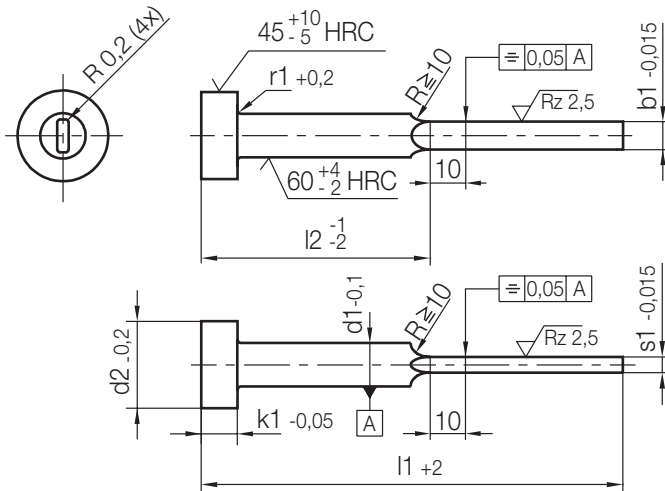


r1	k1	l2	d2	d1	b1	s1	l1	Nr./No.		
0,3	3	40	6	3	2,8	0,5	80	Z4655/2,8x0,5x 80		
							100	105		
							125	125		
							160	160		
							80	160		
							40	0,6	80	Z4655/2,8x0,6x 80
							50	100	100	
							60	125	125	
							80	160	160	
							100	200	200	
		40	0,8	80	Z4655/2,8x0,8x 80					
		50	100	100						
		60	125	125						
		80	160	160						
		100	200	200						
		50	1	100	Z4655/2,8x1 x100					
		60	125	125						
		80	160	160						
		100	200	200						
		40	8	8	4,2	3,8	0,5	80	Z4655/3,8x0,5x 80	
100	100									
125	125									
160	160									
80	160									
40	0,6	80						Z4655/3,8x0,6x 80		
50	100	100								
60	125	125								
80	160	160								
100	200	200								
50	0,8	100		Z4655/3,8x0,8x100						
60	125	125								
80	160	160								
100	200	200								
125	250	250								

r1	k1	l2	d2	d1	b1	s1	l1	Nr./No.		
0,3	3	30	8	4,2	3,8	0,8	63	Z4655/3,8x0,8x 63		
							80	80		
							80	1,2	80	Z4655/3,8x1,2x 80
							100	100		
							125	125		
							160	160		
							200	200		
							250	250		
							315	315		
							160	1	63	Z4655/3,8x1 x 63
		30	80	80						
		40	100	100						
		50	125	125						
		60	160	160						
		80	200	200						
		100	250	250						
		125	315	315						
		160	315	315						
		40	10	10	5	4,5	1,2	80	Z4655/4,5x1,2x 80	
		100						100		
125	125									
160	160									
80	160									
40	0,6	80						Z4655/4,5x1,2x 80		
50	100	100								
60	125	125								
80	160	160								
100	200	200								
125	250	250								
160	315	315								
40	1,5	80		Z4655/4,5x1,5x 80						
50	100	100								
60	125	125								
80	160	160								
100	200	200								
125	250	250								
160	315	315								

Z4655 /...

Flachauswerfer, mit vier Eckenradien
 Flat ejector pin, with four corner radii
 Ejecteur lame, avec 4 rayons d'angle

Mat.: WS (≈ 1.2516)
 DIN ISO 8693 (DIN 1530-4)
 gehärtet/hardened/trempé

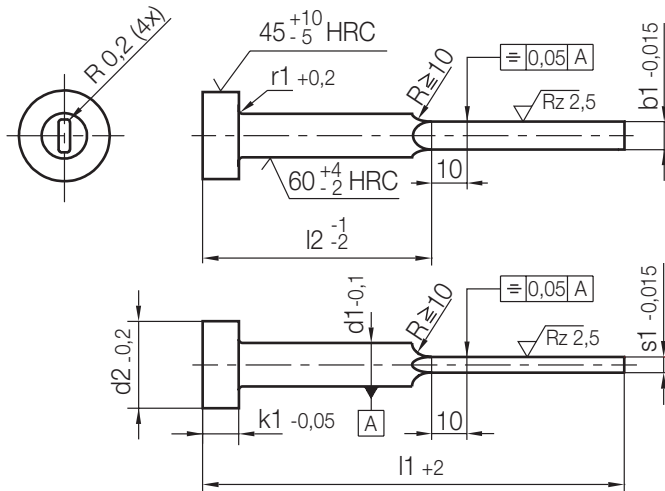

r1	k1	l2	d2	d1	b1	s1	l1	Nr./No.	
0,3	3	40	10	5	4,5	1	80	Z4655/4,5x1 x 80	
		100					100		
		125					125		
		160					160		
		200					200		
		250					250		
		315					315		
		160					315		
0,5	5	40	12	6	5,5	1,2	80	Z4655/5,5x1,2x 80	
		100					100		
		125					125		
		160					160		
		200					200		
		250					250		
		315					315		
		160					315		
		50					1,5	100	Z4655/5,5x1,5x100
		125						125	
		160						160	
		200						200	
		250				250			
		315				315			
		40				1		80	Z4655/5,5x1 x 80
		100						100	
		125					125		
		160					160		
		200					200		
		250					250		
315	315								
100	2	100	Z4655/5,5x2 x100						
125		125							
160		160							
200		200							
0,5	5	125	12	6	5,5	2	250	Z4655/ 5,5x2 x250	
		315					315		
		50					1,2	100	Z4655/ 7,5x1,2x100
		125						125	
		160						160	
		200						200	
		250					250		
		315					315		
		160				1,5	125	Z4655/ 7,5x1,5x125	
		160					160		
		200					200		
		250					250		
		315					315		
		80					2	160	Z4655/ 7,5x2 x160
		200						200	
		250						250	
315	315								
80	9,5	160	Z4655/ 9,5x1,5x160						
200		200							
250		250							
315		315							
100		2	200	Z4655/ 9,5x2 x200					
250			250						
315			315						
100			2	200	Z4655/11,5x2,5x200				
250	250								
315	315								
100	200								
0,8	7		100	18	12	11,5	2,5	200	Z4655/11,5x2,5x200
		250	250						
		315	315						
		100	200						
		125	250						